



RoHS

规格书

客户名称 _____

客户品号 _____

公司品号 _____

送样日期 _____

Client approval 客户审核			Hongli approval 鸿利光电审核		
核准	确认	制作	核准	确认	制作
			林德顺		黄雪梅
接受		不接受	日期:		

/电话 020-86733333
/网址


/传真 020-86733883 86733938 86733265

:1.
2
3

特征

-
-
-
-
-
-
-

SMT

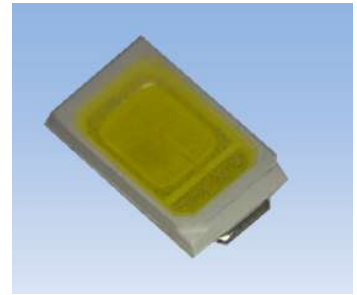


Level 4

2500PCS

RoHS

描述

LED





注意：操作时应注意静电敏感
释放设备装置


应用

LCD


封装尺寸

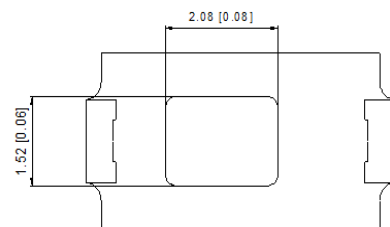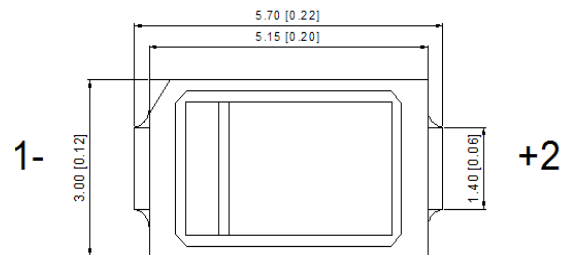



建议焊盘尺寸图

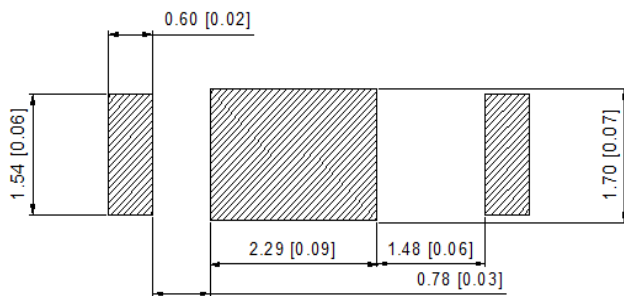

± 0.15mm



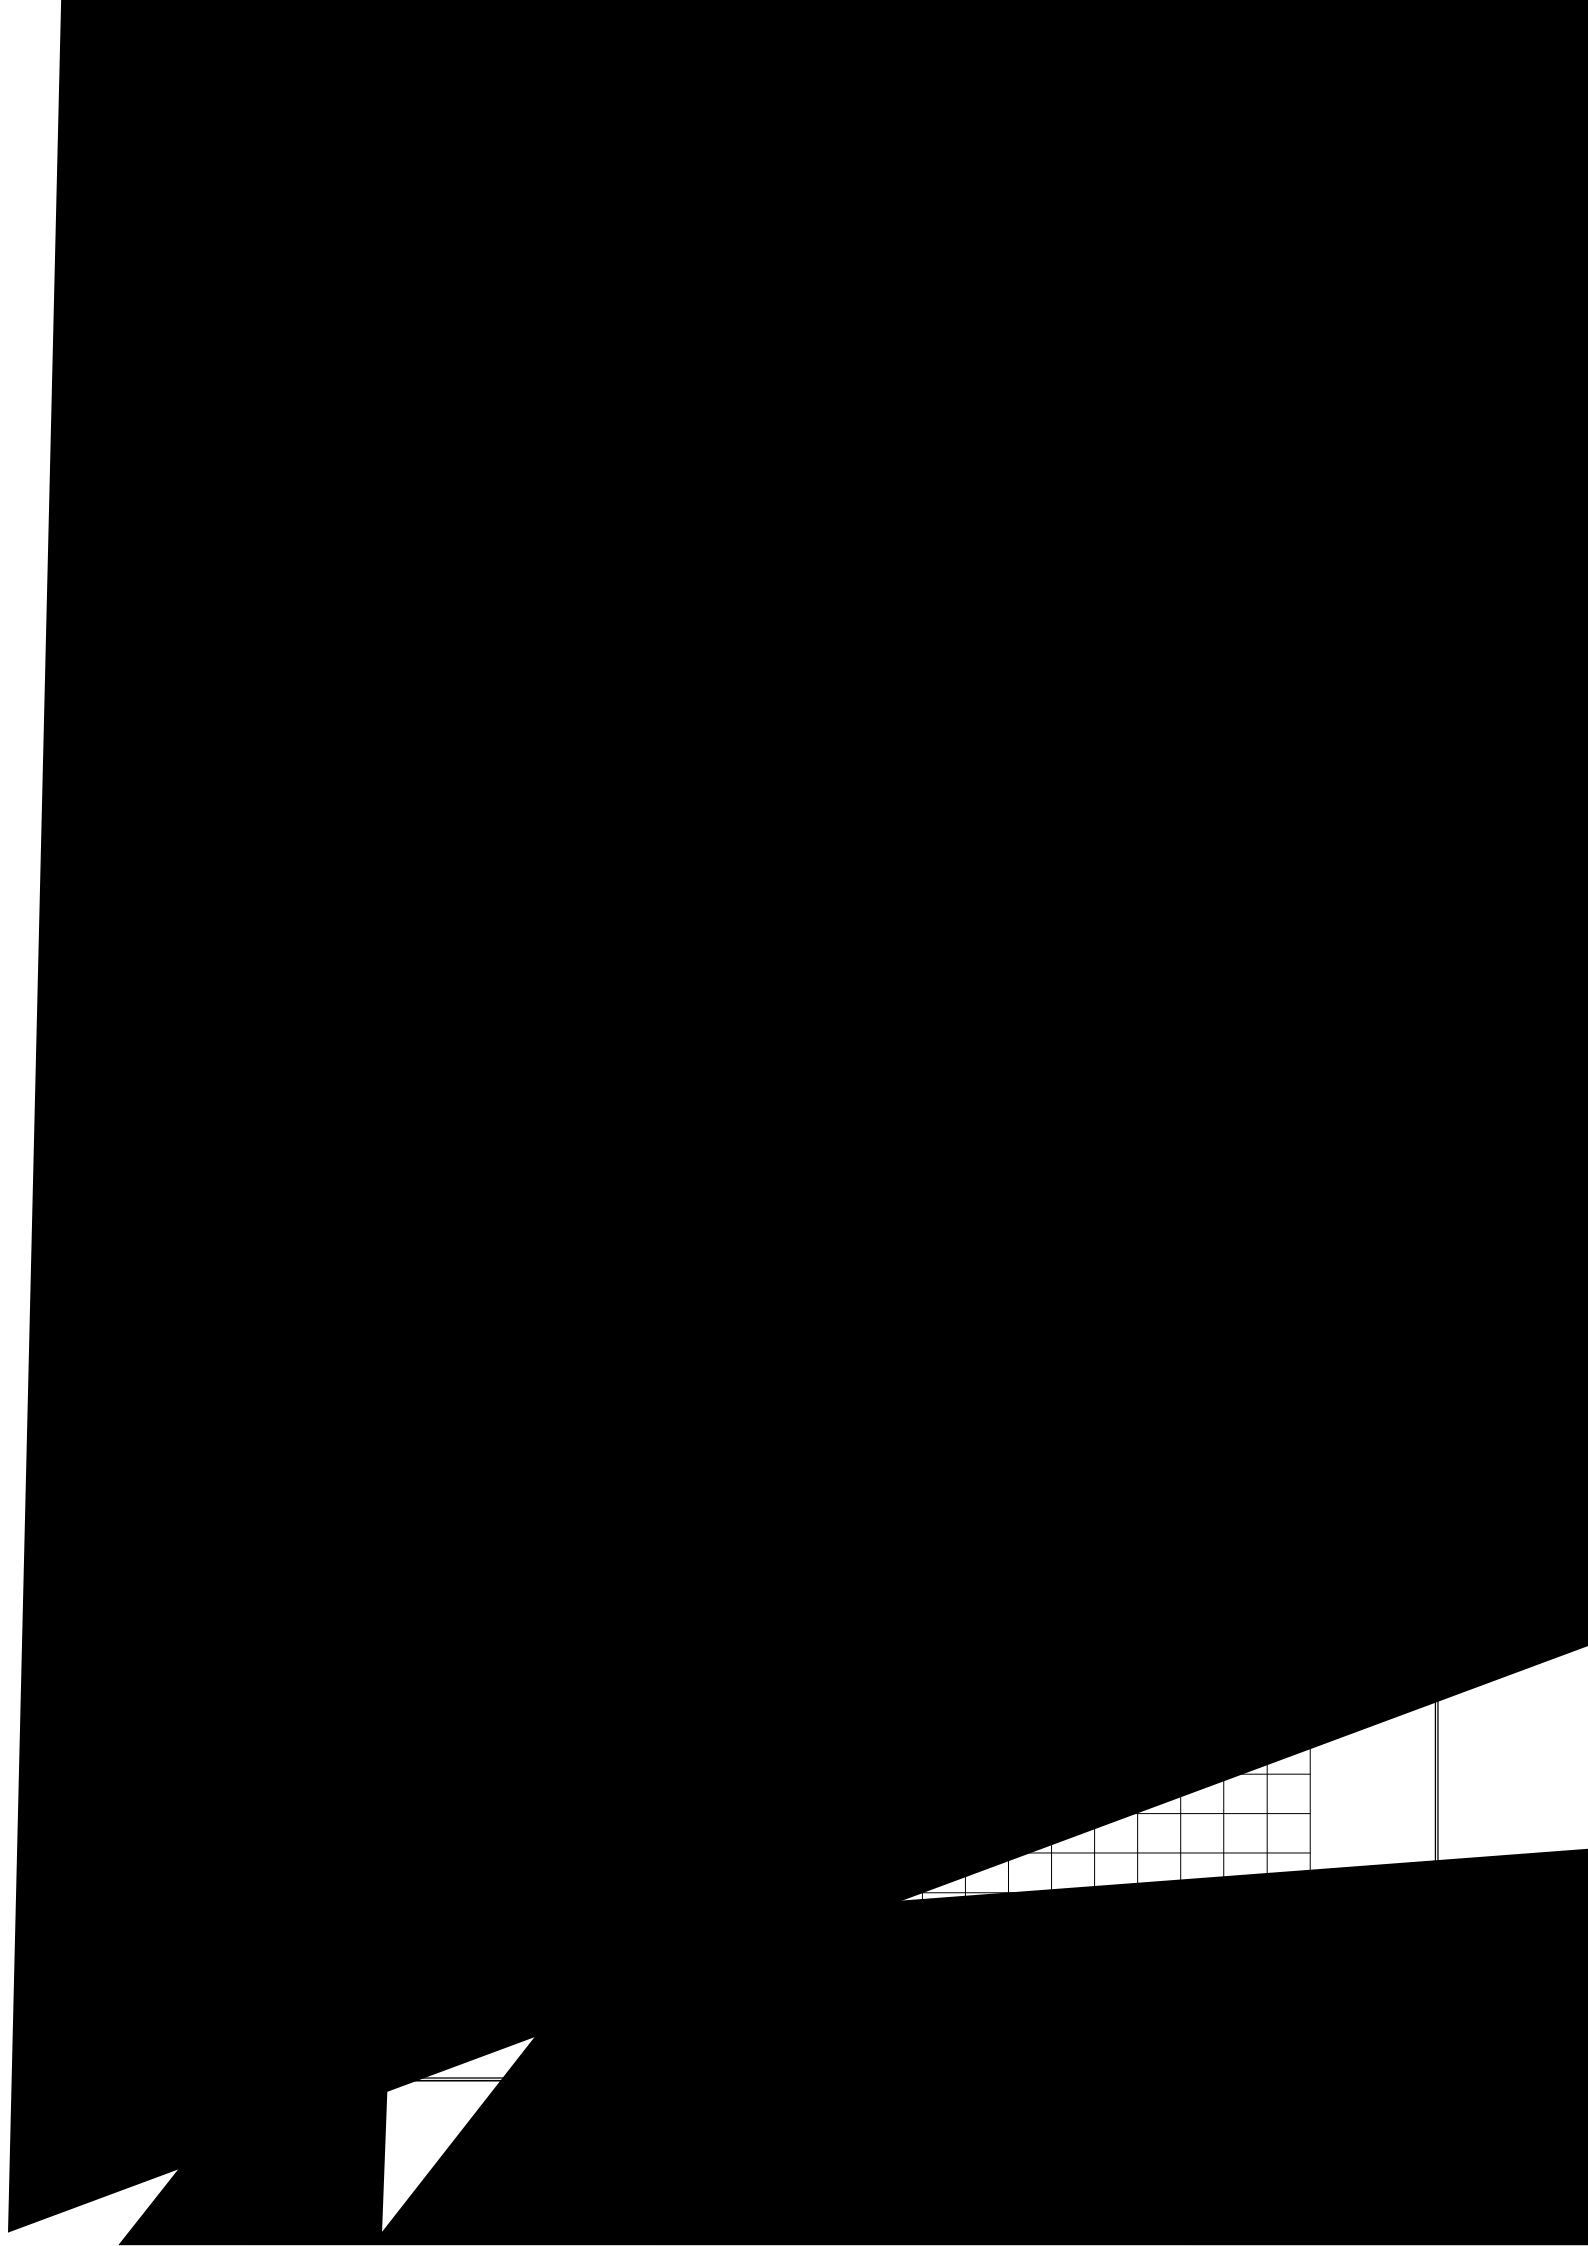

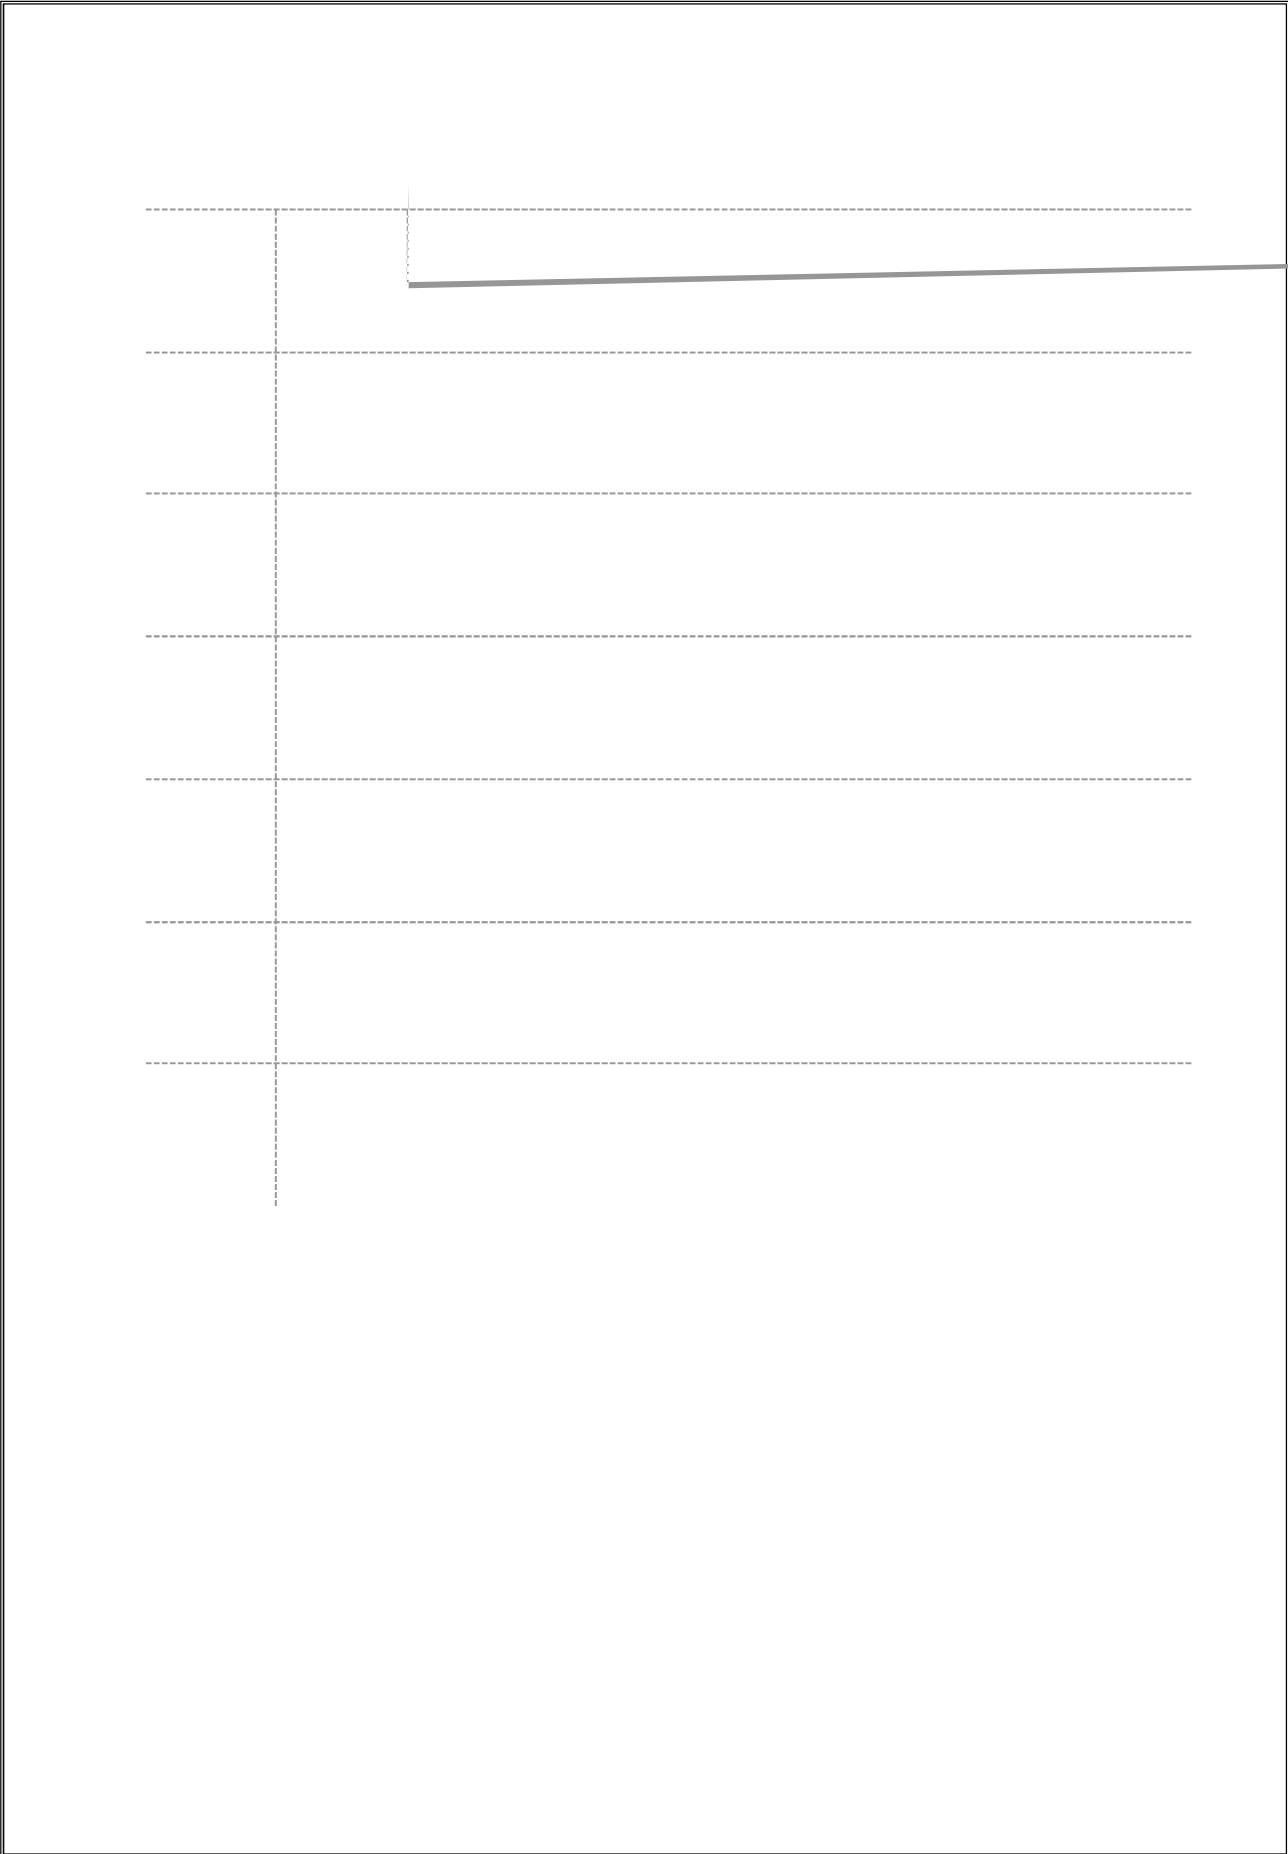




e Bin 区分类及色坐标范围

0.4354	0.4142	0.4316	0.4059
0.4430	0.4165	0.4390	0.4082
0.4390	0.4082	0.4350	0.3998
0.4316	0.4059	0.4279	0.3975
0.4279	0.3975	0.4430	0.4165
0.4350	0.3998	0.4505	0.4189
0.4310	0.3915	0.4463	0.4106
0.4241	0.3892	0.4390	0.4082
0.4390	0.4082	0.4350	0.3998
0.4463	0.4106	0.4420	0.4022
0.4420	0.4022	0.4378	0.3939
0.4350	0.3998	0.4310	0.3915
0.4505	0.4189	0.4463	0.4106
0.4581	0.4212	0.4536	0.4129
0.4536	0.4129	0.4492	0.4045
0.4463	0.4106	0.4420	0.4022
0.4420	0.4022		
0.4492	0.4045		
0.4447	0.3962		
0.4378	0.3939		



回流焊说明

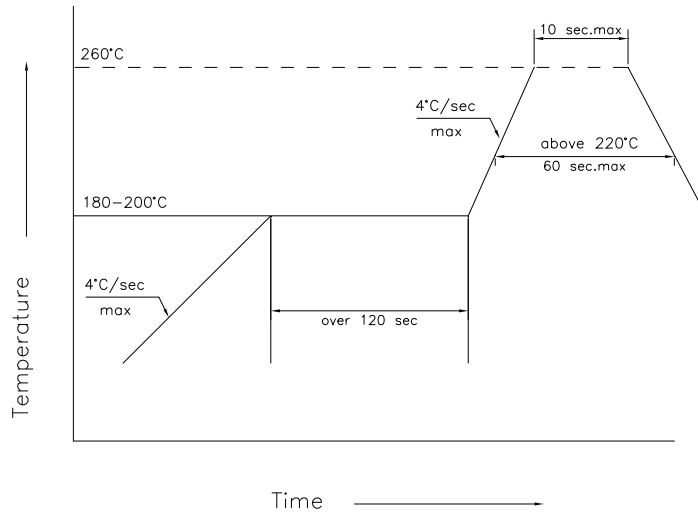


烙铁焊接

300

3

修补

LED
LED

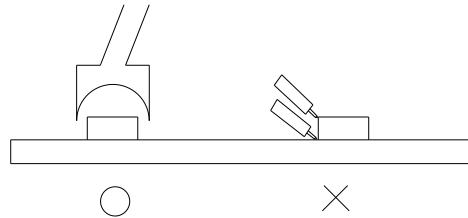


注意事项

LED

LED

LED










LED

LED

1

1



Aluminum moisture-proof bag

Desiccant

Label