



## /Ordering Information

Type	Luminous Intensity $I_v @ I_f=140\text{mA}$	Ordering Code
HVA-3433EES- XXXX - XX - XXXX       Brightness Color Forward Voltage	4.50 -14.00 cd	

## /Maximum Ratings

Parameters	Symbol	Rating	Unit
/ Junction Temperature	$T_j$	125	
/ Forward Current ( $T_s=25$ )	$I_f$	200	mA
Peak Forward Current ( $t \leq 10\mu s$ $D=0.005$ $T_s=25$ )	$I_{fp}$	1000	mA
/ Reverse Voltage ( $T_s=25$ )	$V_r$	12	V
Electrostatic Discharge (HBM)	$V_{ESD}$	2000	V
/ Operating Temperature	$T_{opr}$	-40 ~ +110	
/ Storage Temperature	$T_{stg}$	-40 ~ +110	

/Characteristics ( $T_s = 25$  ;  $I_f = 140$  mA)

Parameters	Symbol	Rating	Unit
/ Wavelength at Peak Emission	typ. $\lambda_{peak}$	625	nm
/ Dominant Wavelength	min. $\lambda_{dom}$	612	nm
	typ. $\lambda_{dom}$	617	nm
	max. $\lambda_{dom}$	624	nm
/ Spectral Bandwidth at 50% $I_{rel}$ max	typ.	18	nm
50 % $I_v$ / Viewing Angle at 50 % $I_v$	typ.	120	°
/ Forward Voltage	min. $V_f$	1.90	V
	typ. $V_f$	2.15	V
	max. $V_f$	2.50	V
/ Reverse Current ( $V_R=12V$ )	typ. $I_r$	0.2	uA
	max. $I_r$	10	uA
PN - / Real Thermal Resistance (Junction / Ambient)	max. $R_{th JA_{real}}$	60	K/W
PN - / Real Thermal Resistance (Junction / Solder Point)	max. $R_{th JS_{real}}$	41	K/W

/Brightness Grouping( $T_s = 25$  ;  $I_f = 140$  mA)

Grouping	Luminous Intensity $I_v$ min.	Luminous Intensity $I_v$ max.	Luminous Flux $\Phi_v$ typ.
----------	----------------------------------	----------------------------------	--------------------------------

## /Information on Label


/E.g. DA-2-3A

/Brightness	/Color	/Forward Voltage
DA	2	3A

-  $V(\lambda) =$


Relative Spectral Emission -  $V(\lambda) =$  Standard Eye Response Curve

$I_{rel} = f(\lambda)$ ;  $T_s = 25^\circ\text{C}$ ;  $I_f = 140\text{ mA}$

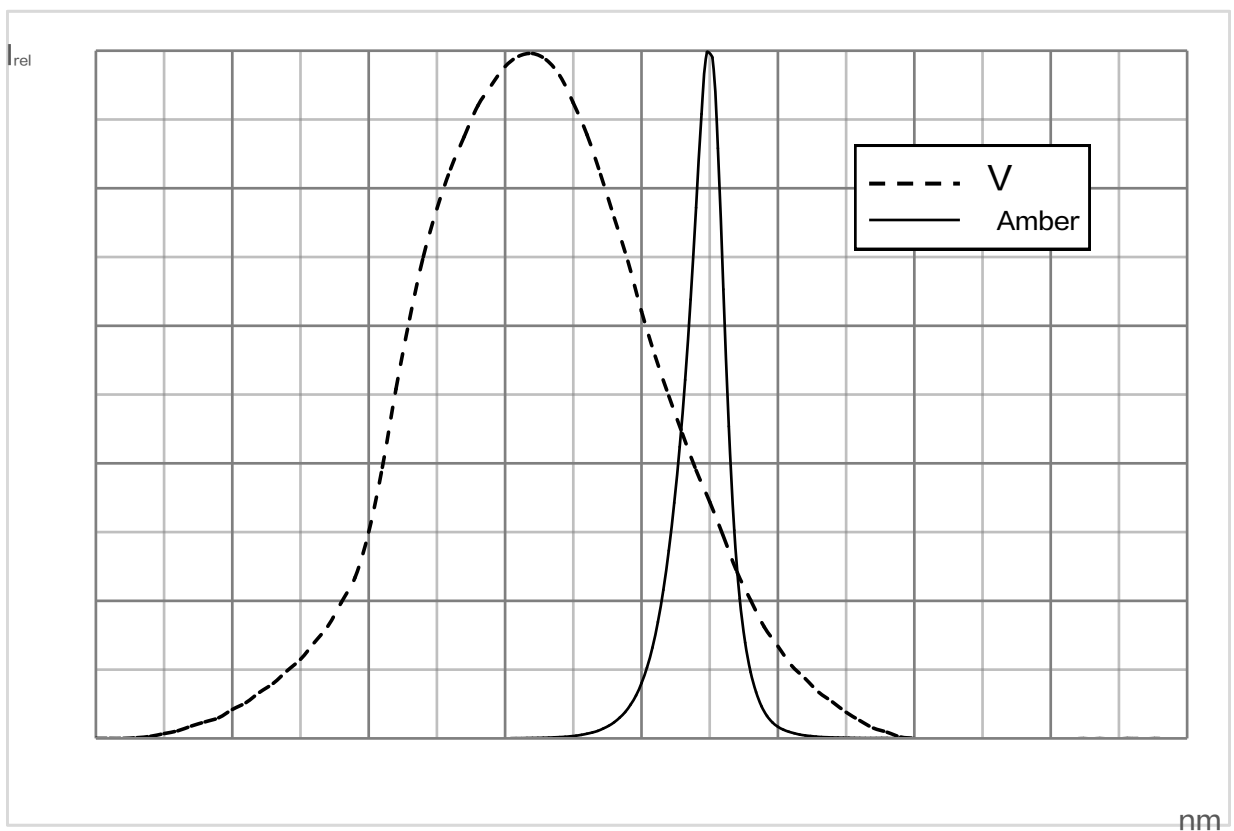


/Radiation Characteristics

$I_{rel} = f(\theta); T_s = 25$

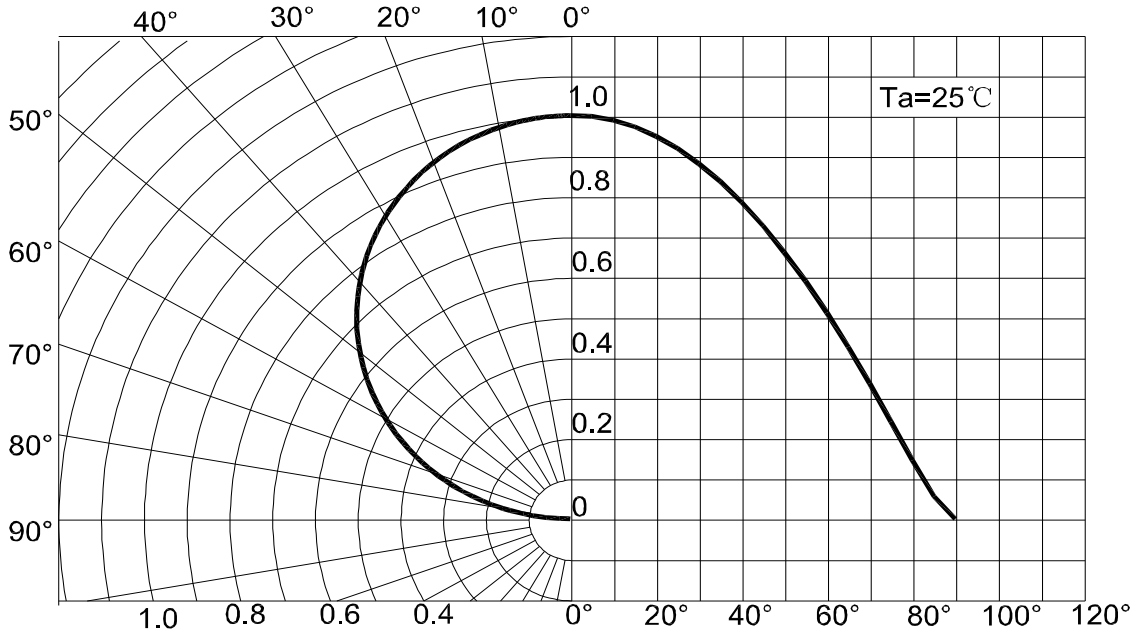


/Forward Current

$I_f = f(V_f); T_a = 25$

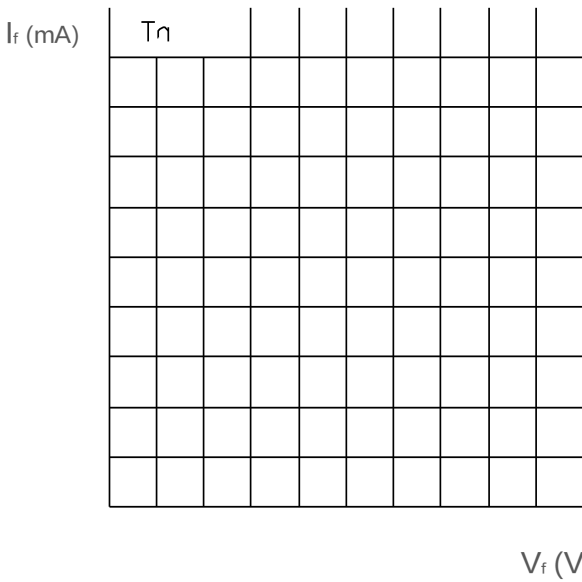


/Relative Luminous Intensity


$I_v/I_v(140\text{ mA}) = f(I_f); T_a = 25$

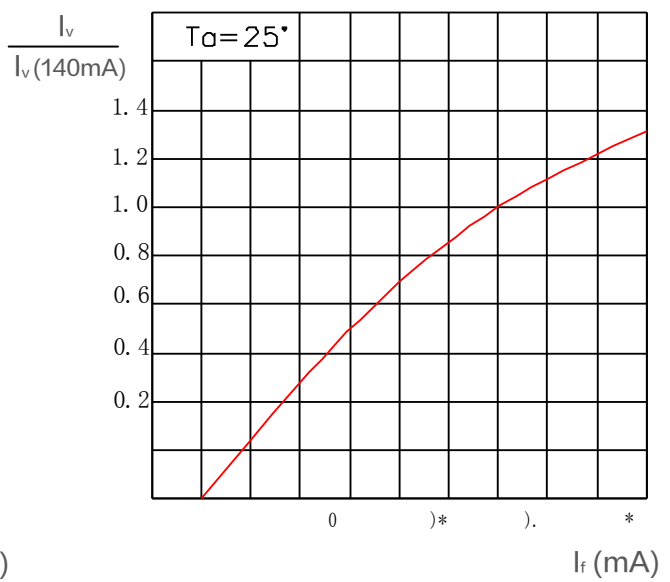


/Relative Forward Voltage  
 $V_f = V_f - V_f(25^\circ) = f(T_j); I_f = 140 \text{ mA}$

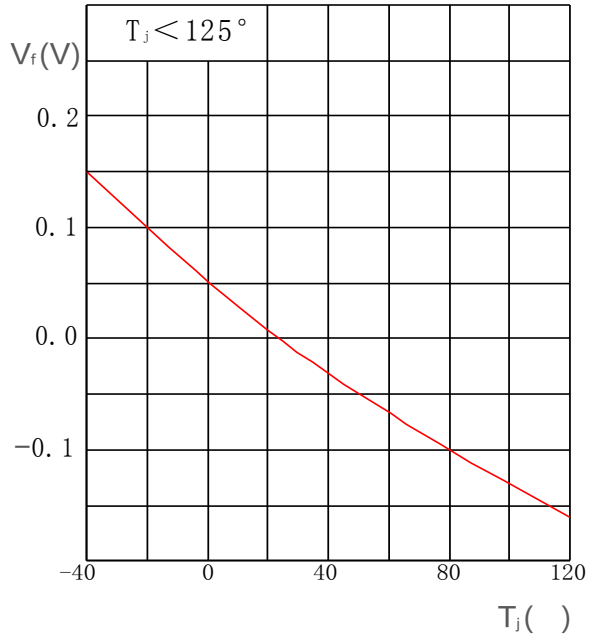


/Relative Luminous Intensity  
 $I_v/I_v(25^\circ) = f(T_j); I_f = 140 \text{ mA}$

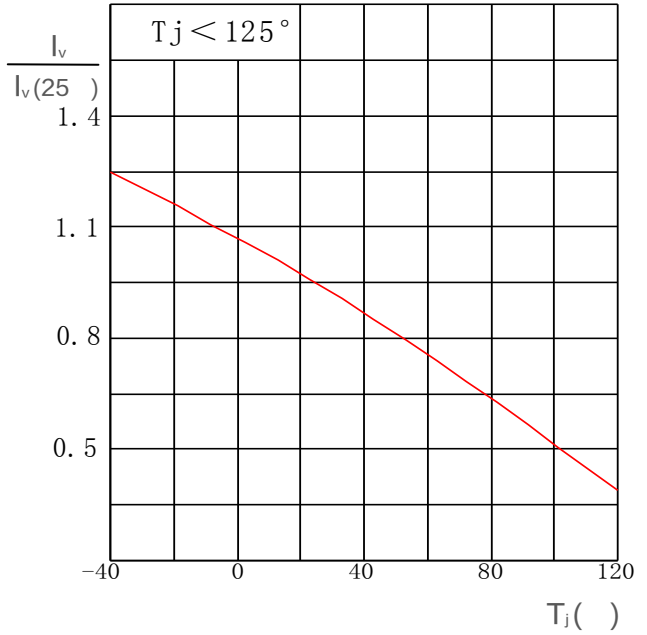


Ambient Temperature vs. Forward Current  
 $I_f = f(T_a)$

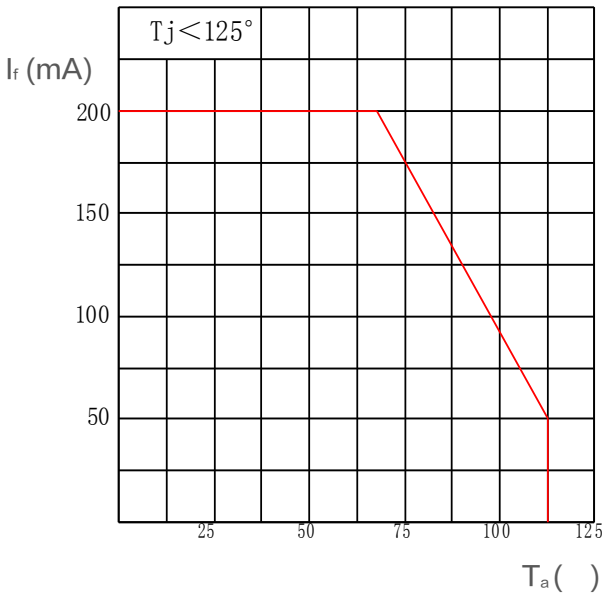


/Solder Point Temperature vs. Forward Current  
 $I_f = f(T_s)$

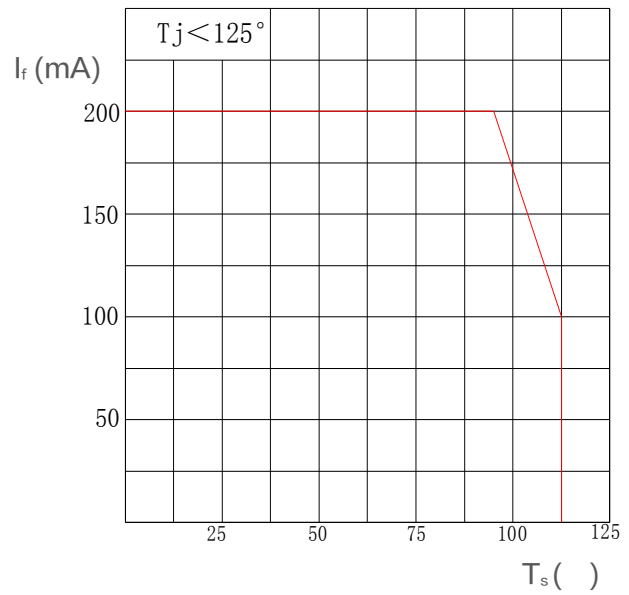

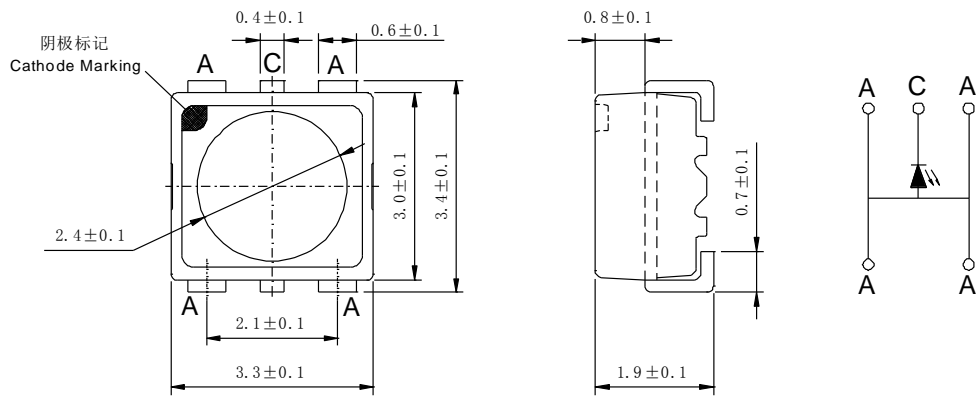




## /Reflow Soldering Profile

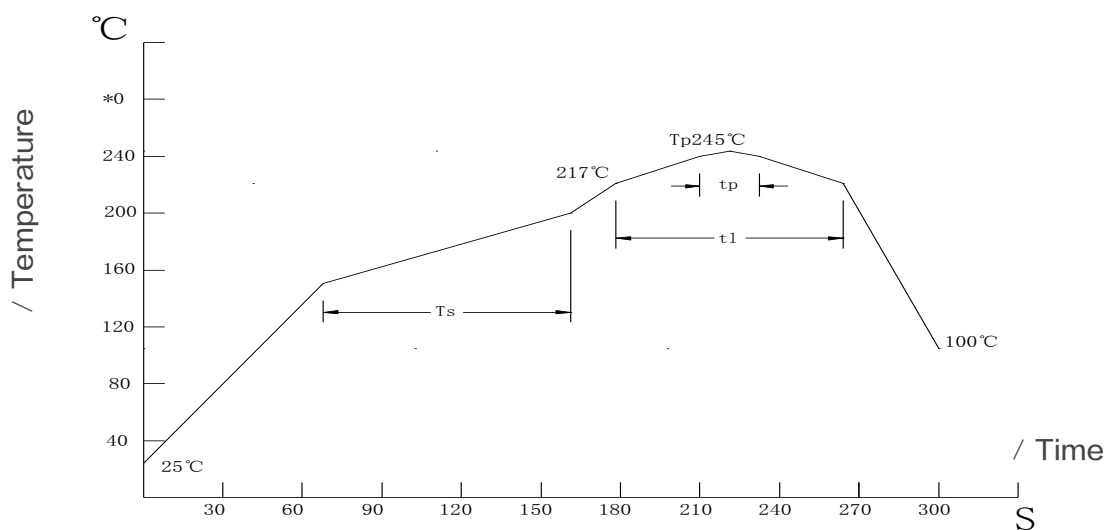

Profile Feature	Symbol	Pb-Free (SnAgCu) Assembly			Unit
		min.	rec.	max.	
Ramp-up Rate to Preheat 25 -150	-	-	2	3	/s
/Time $T_{smin}$ to $T_{smax}$	$T_s$	60	100	120	s
Ramp-up Rate to Peak $T_{smax}$ to $T_p$	-	-	2	3	/s
Liquidus Temperature	$T_l$		217		
Time above Liquidus Temperature	$t_l$	-	80	100	s
/Peak Temperature $\pm 5$	$T_p$	-	245	260	
Time within 5 of the Specified Peak Temperature	$t_p$	10	20	30	s
/Ramp-down Rate $T_p$ to 100	-	-	3	6	/s
/Time 25 to $T_p$	-	-	-	480	s

/Tape and Reel

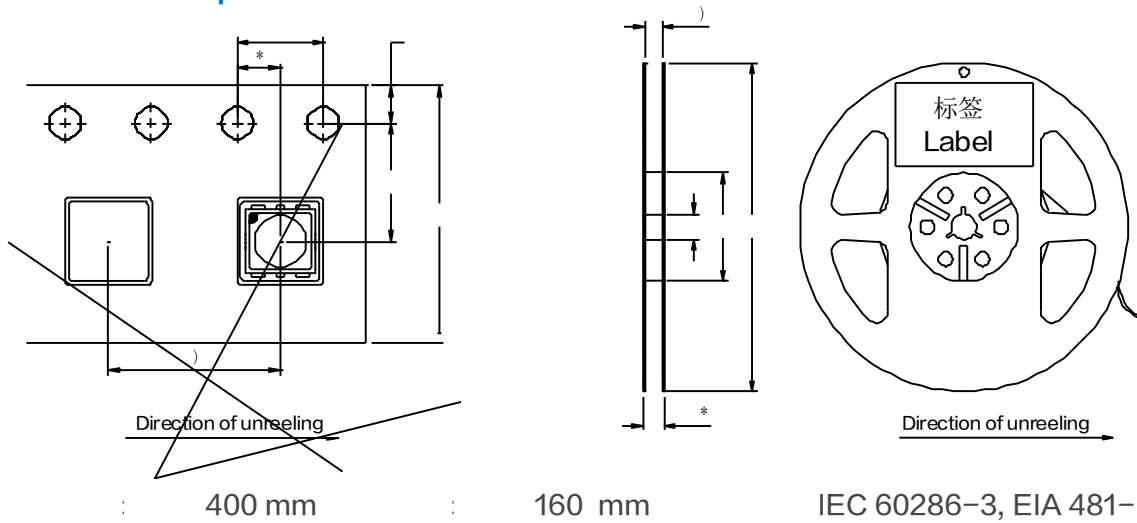

D

Leader: min. 400 mm Trailer: min. 160 mm Requirement acc. to IEC 60286-3, EIA 481-D


/Tape Dimensions mm

W	P0	P1	P2	D0	E	F
8± 0.1	4± 0.1	4± 0.1	2± 0.05	1.5± 0.1	1.75± 0.1	3.5± 0.05


/Reel Dimensions mm

A	W1	W2	N	R
177.8	9.3± 0.3	11.2± 0.3	58.5± 0.2	13.5± 0.2

## /Barcode-Product-Label (BPL)

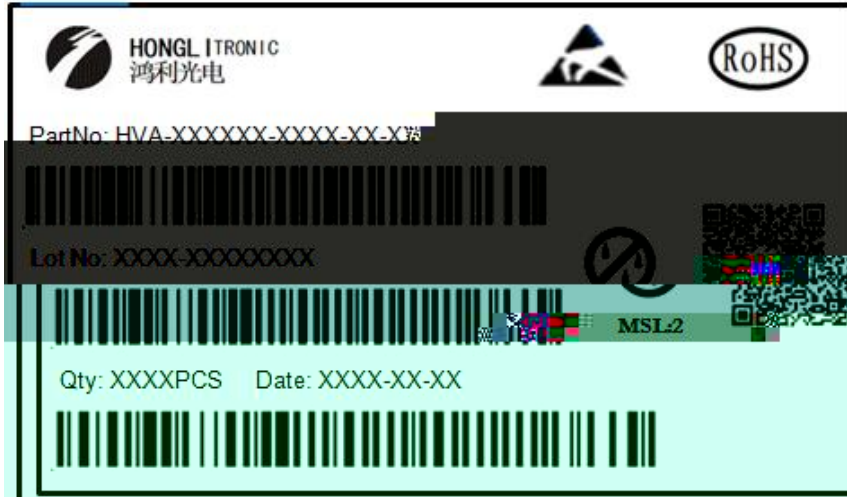

## /Dry Packing Process and Materials

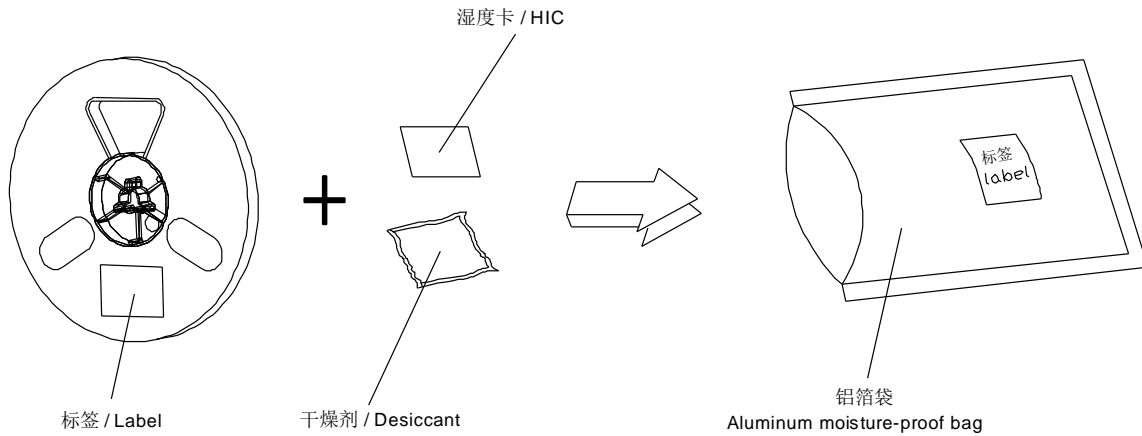


JEDEC

### NOTE

Moisture-sensitive product is packed in a dry bag containing desiccant and HIC (humidity indicator card).

Regarding dry pack you may find further information in the internet or JEDEC.

## /Transportation Packing and Materials

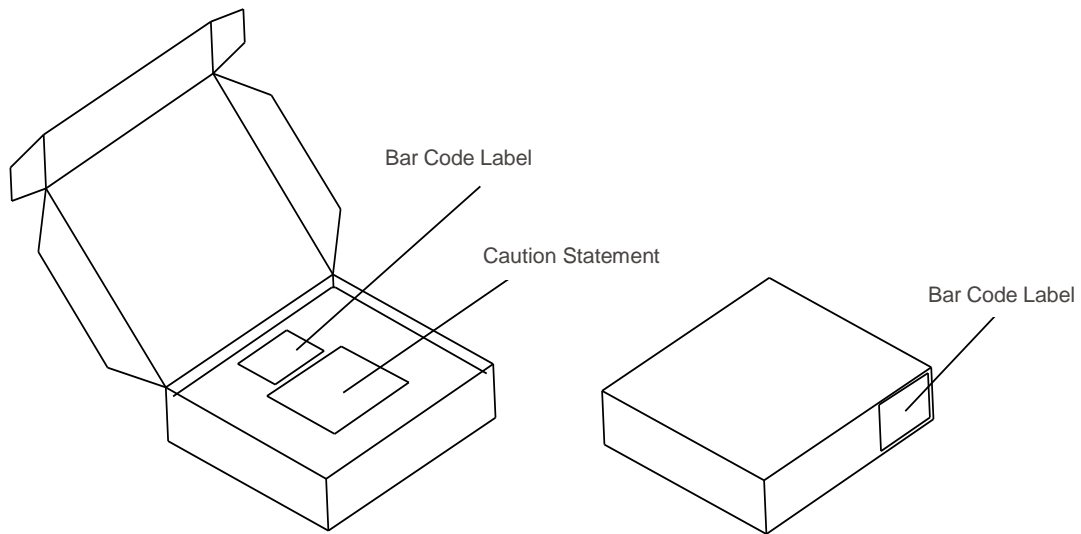

## /Dimensions of Transportation Box (mm)

/Width	/Length	/Height
256± 5	223± 5	62± 5
256± 5	223± 5	124± 5

:			
:	,	$\pm 0.1 \text{ mm}$	
	8ms	$\pm 0.05\text{V}$	$\pm 0.1\text{V}$
	GUM K=3		
	25ms	$\pm 0.5\text{nm}$	$\pm 1\text{nm}$
	GUM K=3		
	25ms	$\pm 8\%$	$\pm 11\%$
	GUM K=3		

## Glossary

**Typical Values:** Actual values of each product may differ from these statistical values .

**Tolerance of Measure:** Unless otherwise noted in drawing, tolerances are specified with +/-0.1mm.

**Forward Voltage:** The forward voltage is measured during a current pulse of typically 8 ms, with an internal reproducibility of  $\pm 0.05 \text{ V}$  and an expanded uncertainty of  $\pm 0.1 \text{ V}$  (acc. to GUM with a coverage factor of  $k = 3$ ).

**Wavelength:** The wavelength is measured at a current pulse of typically 25 ms, with an internal reproducibility of  $\pm 0.5 \text{ nm}$  and an expanded uncertainty of  $\pm 1 \text{ nm}$  (acc. to GUM with a coverage factor of  $k = 3$ ).

**Brightness:** Brightness values are measured during a current pulse of typically 25 ms, with an internal reproducibility of  $\pm 8\%$  and an expanded uncertainty of  $\pm 11\%$  (acc. to GUM with a coverage factor of  $k = 3$ ).

**Special Statement:** The final interpretation of this specification shall be vested in Honglitronic, in the case of ambiguity, the Chinese version shall prevail.